

Feature -

bi-color LED illuminated available
SPST, DPDT, lock / non-lock function

Application -

audio / video products
instrumentation
communication equipments


► SPECIFICATIONS

SWITCH SPECIFICATIONS	
POLE - POSITION	SPST , DPDT
CONTACT RATING	30 V DC , 0.1 A
CONTACT RESISTANCE	50 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	250 ± 100 gf
OPERATING LIFE	100,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C
TOTAL TRAVEL / LOCK TRAVEL	2.5 ± 0.3 mm / 1.5 ± 0.3 mm

LED SPECIFICATIONS		Unit	Value / LED Color			
			Blue	Green	Red	Yellow
	ATTENTION					
	LEDs are Electrostatic Sensitive devices					
FORWARD CURRENT	If	mA	20	20	20	20
REVERSE VOLTAGE	Vr	V	5.0	5.0	5.0	5.0
REVERSE CURRENT	Ir	μA	10	10	10	10
FORWARD VOLTAGE@20mA	Vf	V	3.3-4.0	2.1-2.5	2.0-2.5	2.0-2.5
LUMINOUS INTENSITY@20mA	Iv	mcd	1300	700	900	700


■ Physical and electrical information of LED will be provided upon customer's request on switches .

► HOW TO ORDER

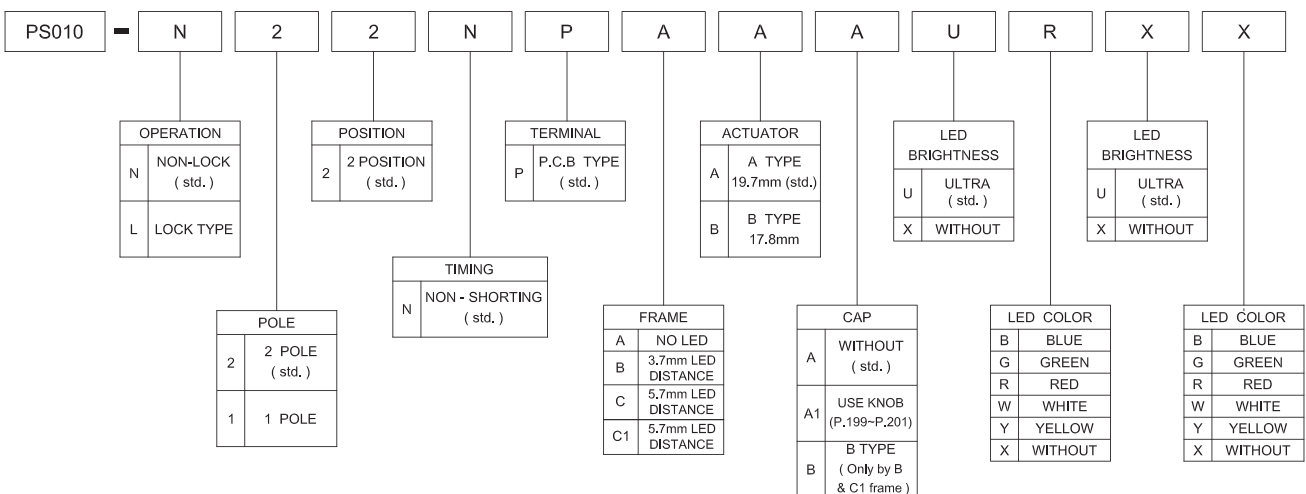


▶ DIMENSION


PS010 - N22NPABAXXX

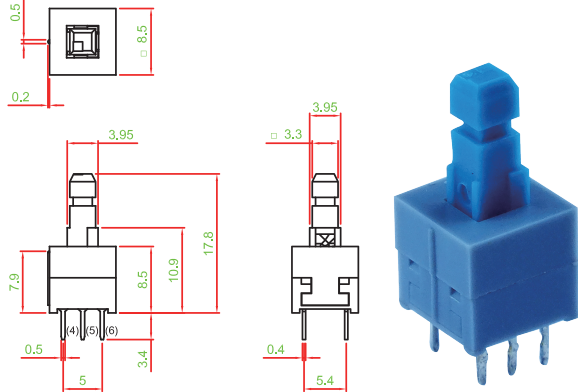


PS010 - N22NPBAA □ □ □ □

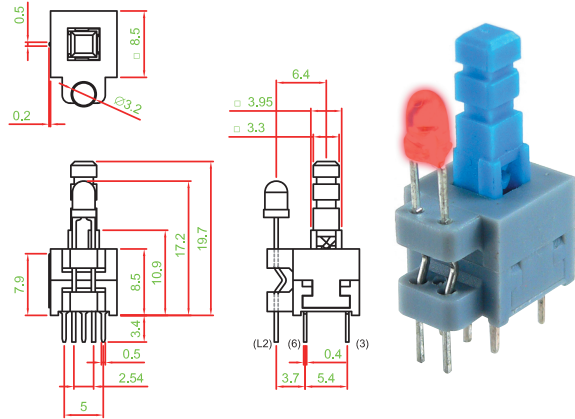


PS010 - N22NPCAA □ □ □ □

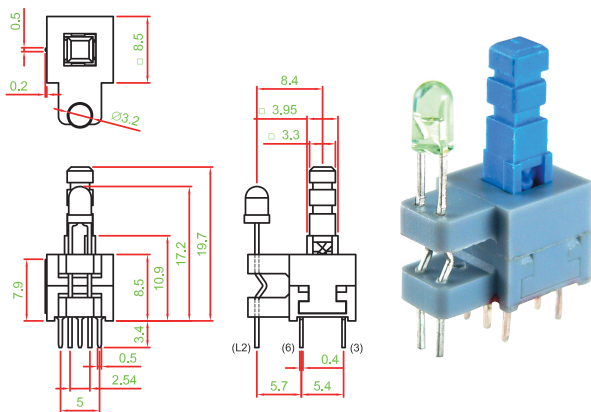


PS010 - N22NPC1AA □ □ □ □

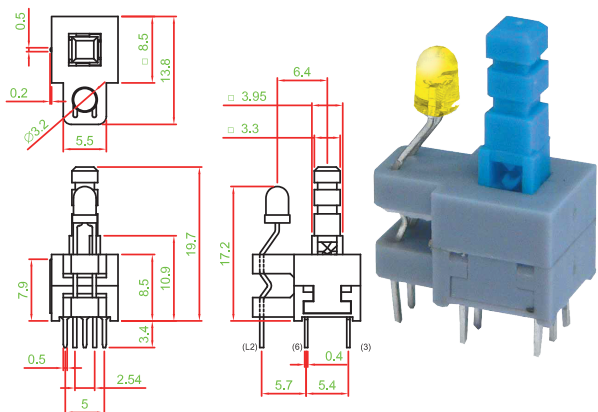

▶ P.C.B LAYOUT

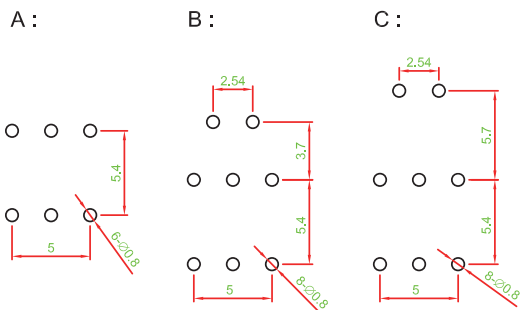

▶ CIRCUIT



▶ KNOB OPTION



▶ MATERIAL

- ACTUATOR : PA
- TERMINAL : BRASS SILVER PLATING
- BASE FRAME : PA + GF
- SPRING : STAINLESS STEEL