

Feature -

Suitable for programming applications
Very compact socket Ø 2.55 mm [0.10"]


Application -

Hearing aid
Hand-held device

► SPECIFICATIONS



SWITCH SPECIFICATIONS	
CONNECTION FORCE	4 PINS : 300 gf MIN. 5 PINS : 350 gf MIN.
DISCONNECTION FORCE	4 PINS : 600 gf MAX. 5 PINS : 650 gf MAX.
CONTINUOUS CURRENT	150 mA MAX.
CONTACT RESISTANCE	100 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	1 MΩ MIN. 100 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 110 V AC for 1 Minute
TEMPERATURE RANGE	STORAGE TEMPERATURE : -40°C ~ 80°C OPERATING TEMPERATURE : -20°C ~ 70°C
OPERATING LIFE	10,000 cycles MIN.

► HOW TO ORDER


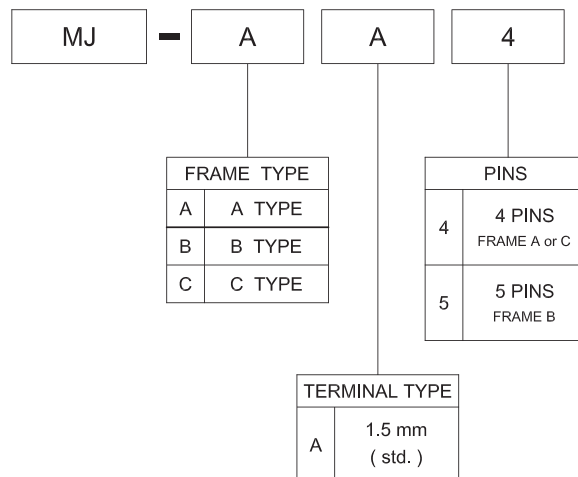


▶ DIMENSION



MJ-AA4

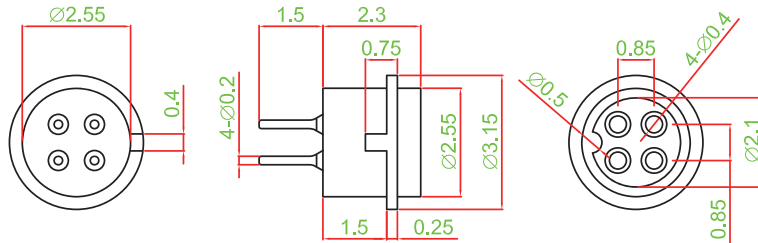

MJ-BA5

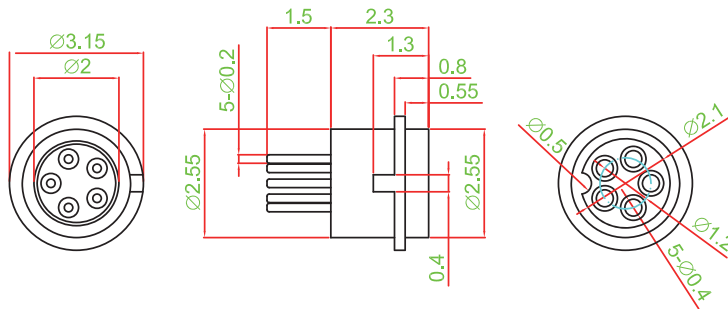

MJ-CA4

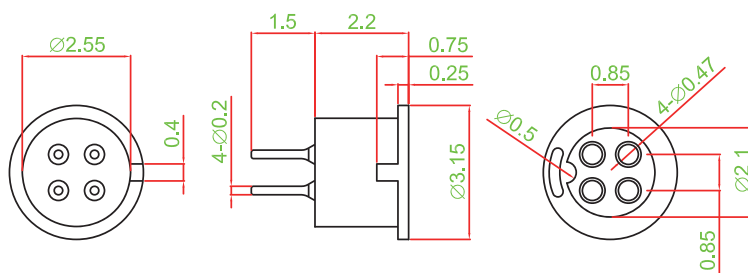

▶ MATERIAL

- BASE FRAME : PA + GF
- TERMINAL : BRONZE GOLD FLASH