

Feature -

DPDT  
on-on function


Application -

consumer products  
computer products  
instrumentation  
communication equipments

► SPECIFICATIONS

SWITCH SPECIFICATIONS	
POLE - POSITION	1P2T , Momentary
CONTACT RATING	36 V DC , 0.2 A
CONTACT RESISTANCE	40 mΩ MAX, 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable 500 V DC for 1 Minute
OPERATING FORCE	300 ± 100gf
OPERATING LIFE	1,000,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C
TOTAL TRAVEL	5.8 ± 0.3 mm

► HOW TO ORDER

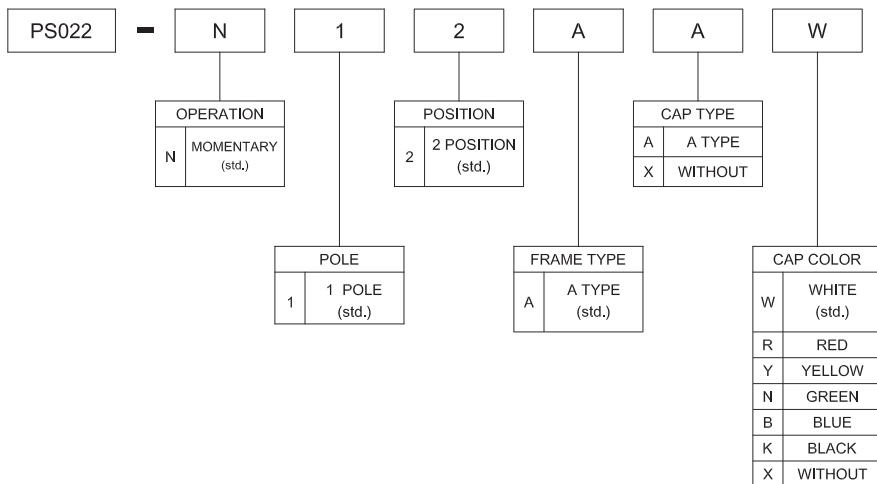

▶ DIMENSION		
PS022-N12AXX		
PS022-N12AAW		
▶ CIRCUIT	▶ P.C.B LAYOUT	▶ MATERIAL
		<ul style="list-style-type: none"> <li>■ COVER : PA + GF</li> <li>■ ACTUATOR : PA + GF</li> <li>■ BASE FRAME : PA + GF</li> <li>■ CAP : PA</li> <li>■ TERMINAL : BRONZE GOLD FLASH</li> </ul>